


Excellent Technology, Efficiency and Quality



THYROTRONIC

Rectifier for stationary battery systems
Safe, reliable & powerful

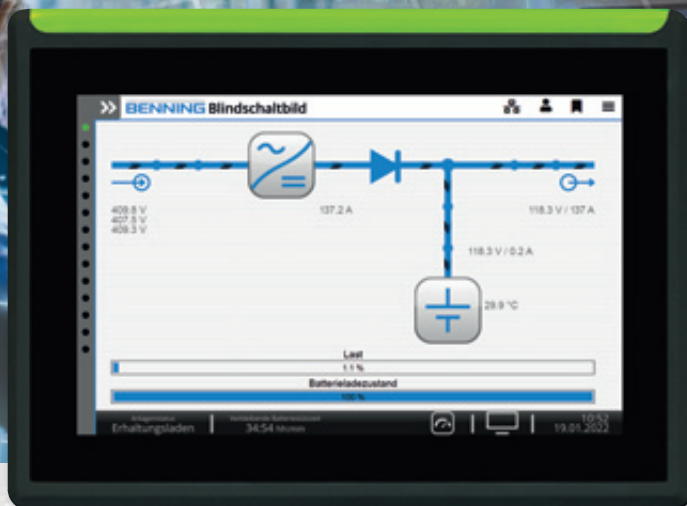

Robust and reliable, tried and tested

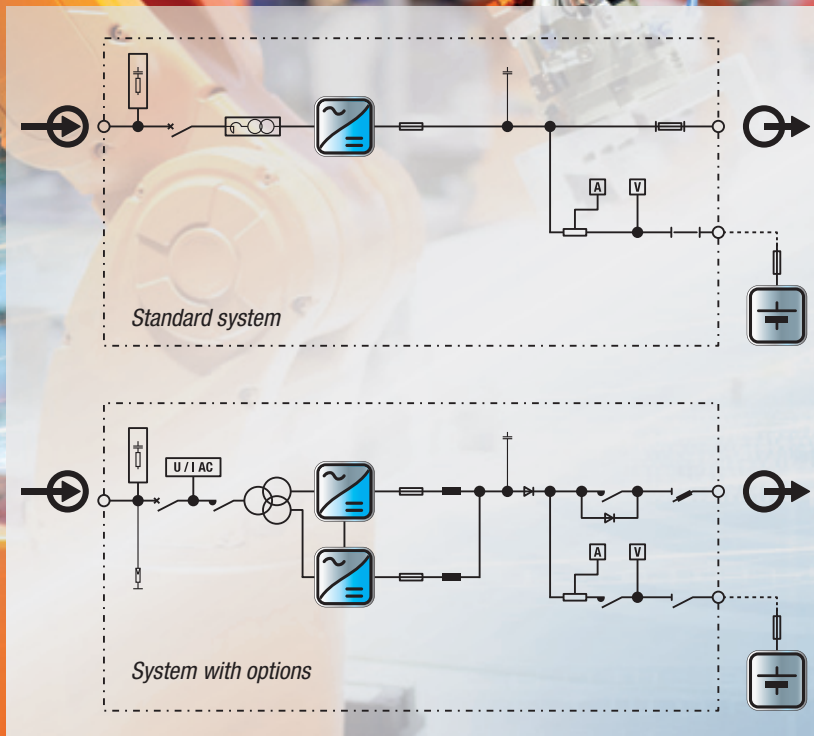


Figure 1: THYROTRONIC circuit diagrams



Figure 2: THYROTRONIC Rectifier with interior view

Overview

Battery-supported DC power supply systems have proven to be extraordinarily reliable and very economical back-up power supplies for many decades. The reliability of a battery-supported backup power supply depends on the quality of the battery used and the operational reliability of the rectifier device.

BENNING has developed the THYROTRONIC rectifier series to be particularly suitable for use with battery-supported DC power supplies (see Fig. 2). In addition to great reliability, it offers a comprehensive signalling and monitoring concept.

These backup power supplies are used in the following fields

- Power plants
- Transformer substations
- Oil and gas industry
- Railway systems
- Airports
- Hospitals
- Mining installations
- Industrial plants

Significant advantages

- **Constructed from few but reliable components**
 - Mechanically and electronically resistant, designed for harsh environmental conditions
- **Wiring concept**
 - State-of-the-art DSP technology
- **Automatic temperature-controlled charging characteristic**
- **Galvanic isolation**
- **High quality output power**
 - Fully controlled thyristor three-phase bridge, 6 pulse (standard), 12 pulse (optional)
- **Suitable for all battery technologies**

- **safe & reliable**
- **powerful & economical**
- **for harsh environmental conditions**



THYROTRONIC 10" touch display (figure 3)

Modern touch display with intuitive guidance through a user interface optimized by BENNING



Extended THYROTRONIC basic display (figure 4)

Equipped with a display and control unit (LCD and pushbuttons) and a freely configurable status display



THYROTRONIC Basic display (figure 5)

Display and control unit with LCD and push buttons

Signalling and monitoring module

All available measurement channels can be provided with measurement and error thresholds. Freely definable limit values can be set to trigger the error or warning messages. The display and control unit built into the front door of the rectifier housing is used to enter the limit values and to confirm and visualise the messages (see figure 4/5). Optionally, the system can be equipped with a 10" touch display, which sets completely new standards in terms of ease of use and comprehensibility (see figure 3).

Supported monitoring types:


- Network monitoring
- Battery and DC voltage monitoring
- Temperature monitoring
- Over- and undervoltage monitoring

THYROTRONIC – additional functions

- Programmable automatic boost charge
- Equalising and initial charge
- Parallel operation of several rectifiers with active or passive load sharing
- Automatic and programmable battery circuit test
- Automatic battery capacity test
- Compensation of line resistance
- Display of the remaining battery life

Suitable for all battery technologies

THYROTRONIC rectifier devices work with an electronically controlled output characteristic (IU characteristic according to DIN 41773) (see Fig. 6) and are suitable for use with lead and NiCd batteries as well as other modern battery technologies.

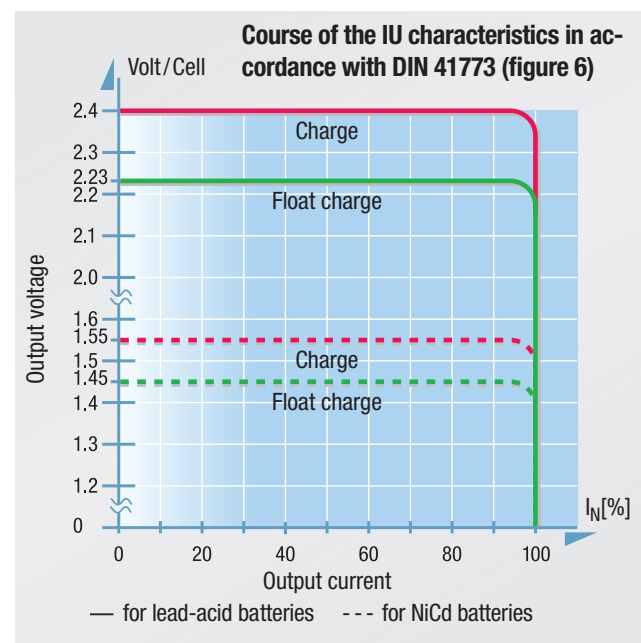

Technical data

Input															
Input voltage (1-phase)			120 V, 220 V, 230 V, 240 V ± 10 % (additional options available on request)												
Input voltage (3-phase)			208 V, 380 V, 400 V, 415 V, 480 V, 600 V, 690 V ± 10 % (additional options available on request)												
Frequency			50 Hz, 60 Hz ± 10 %												
Efficiency			up to 94 % (depending on type)												
Output															
Nominal output voltage			24 V		48 V		60 V		110 V/125 V		220 V/240 V				
min. voltage			18 V		36 V		45 V		81 V		162 V				
max. voltage float charge			27.6 V		55.2 V		69 V		138 V		276 V				
max. voltage charge increase			28.8 V		57.6 V		72 V		144 V		288 V				
max. voltage equalising charge			32.4 V		64.8 V		81 V		156 V		312 V				
Usable battery technology			Lead, NiCd, lithium ions (additional options available on request)												
Charging characteristic			IU (in accordance with DIN 41773)												
Static voltage regulation			± 1 %												
Voltage ripple			(without battery) ≤ 5 %, optional ≤ 1 %, battery eliminator according to NEMA PE-5												
Ventilation			forced ventilation / redundant forced ventilation (three-phase) *2												
Classification [A]			150	200	300	400	500	600	800	1000	1200	1600	2000		
Output voltage	24 V	WxD [mm] *1	600 x 800		800 x 800						1200 x 800		1600 x 800		2000 x 800
		Weight [kg]	380	395	450	495	540	580	665	850	910	1090	1270		
	48 V	WxD [mm]	600 x 800		800 x 800						1200 x 800		1600 x 800		2000 x 800
		Weight [kg]	420	440	515	535	580	630	750	900	1040	1160	1380		
	60 V	WxD [mm]	600 x 800		800 x 800						1200 x 800		1600 x 800		2000 x 800
		Weight [kg]	430	460	570	650	720	780	950	1050	1175	1300	1550		
	110 V/125 V	WxD [mm]	600 x 800		800 x 800						1200 x 800		1800 x 800		2000 x 1000
		Weight [kg]	485	520	620	700	740	850	1050	1450	1600	1750	2200		
	220 V/240 V	WxD [mm]	600 x 800		800 x 800		900 x 800			1200 x 1000	1600 x 1000	2000 x 1000			
		Weight [kg]	650	750	900	1000	1200	1350	1650	1980	2180	2620	3270		
Ventilation			natural convection (three-phase) *2							natural convection (single-phase) *3					
Classification [A]			50	100	150	200	300	400	500	25		50	100		
Output voltage	24 V	WxD [mm]	600 x 800						800 x 800		600 x 600				
		Weight [kg]	345	365	380	395	450	495	540	250		275	300		
	48 V	WxD [mm]	600 x 800						800 x 800		600 x 600				
		Weight [kg]	370	395	420	440	515	535	580	265		290	315		
	60 V	WxD [mm]	600 x 800						800 x 800		600 x 600				
		Weight [kg]	380	405	430	460	570	650	720	275		300	325		
	110 V/125 V	WxD [mm]	600 x 800						800 x 800	900 x 800	600 x 600				
		Weight [kg]	395	440	485	520	620	700	740	290		315	340		
	220 V/240 V	WxD [mm]	600 x 800						800 x 800	900 x 800	600 x 600				
		Weight [kg]	420	550	650	750	900	1000	1200	315		340	-		
General data									Options: • 10" touch display • Analogue display instruments • MODBUS, IEC 61850 and many more • Battery cabinets / distribution cabinets • Internal and external counter cells • External battery connection boxes (opt. Ex-d/Ex-de types) • Decoupling diodes • Ground fault monitoring • Parallel operation with and without active load sharing						
Protection class		IP20 ... IP52 (additional classes available on request)													
Operating temperature		-10 ... 40 °C (power reduction at higher temperatures)													
Storage temperature		-40 ... 85 °C													
Relative humidity		5 ... 95 % (non-condensing)													
Installation height		2000 m (without power reduction) (max. 5000 m)													
Cable entry		from below (from above possible on request)													
Colour		RAL 7035 (other colours on request)													
Sound volume		normally < 65 dBA													
Standards															
Safety		EN 62477-1													
EMC		EN 61000-6-2; EN 61000-6-4; EN 61000-6-5													
		EN 62040-2													
Power		EN 60146-1-1; EN 62040-5-3													

*1 Measurements *2 Cabinet height = 2000 mm, other dimensions on request.
Higher classifications available on request. Subject to technical changes.

*3 Cabinet height = 1300 mm, other dimensions on request.
Subject to technical changes.

Options:

- 10" touch display
- Analogue display instruments
- MODBUS, IEC 61850 and many more
- Battery cabinets / distribution cabinets
- Internal and external counter cells
- External battery connection boxes (opt. Ex-d/Ex-de types)
- Decoupling diodes
- Ground fault monitoring
- Parallel operation with and without active load sharing

Find your contact partner worldwide
on our website using the contact selector!
Simply scan the QR code shown here
with your smartphone.



BENNING

Benning Elektrotechnik und Elektronik GmbH & Co. KG
Münsterstr. 135-137 • 46397 BOCHOLT / Germany
Tel.: +49 (0) 28 71 / 93-0 • E-Mail: info@benning.de
www.benning.de