

Excellent Technology, Efficiency and Quality



INVERTRONIC modular

Three Phase Inverter System
with Modular, Hot-Plug Design



INVERTRONIC modular - Three Phase Inverter with Modular Hot-Plug Design

High Power Protection with INVERTRONIC modular

More and more mission critical loads in information, telecommunication and industrial applications demand continuous power protection and availability in the event of mains failure and reasonable power quality in the event of critical mains conditions.

On the public network, major loads as well as lightning strikes, generate dynamic overvoltages, undervoltages, sags / brownouts and transients.

Fig.1 illustrates some examples of mains disturbances which can influence microprocessor-based equipment in production or communication systems

Voltage Phenomenon	Time	e.g.
1. Outage - blackouts	> 10 ms	
2. Sags/brownouts	< 16 ms	
3. Dynamic overvoltage	4...16 ms	
4. Undervoltage	continuous	
5. Overvoltage	continuous	
6. Transients (Surge)	< 4 ms	
7. Lightning	sporadic	
8. Voltage distortion HF (Burst)	periodically	
9. Voltage harmonics	continuous	
10. Frequency variations	sporadic	

published by ZVEI: UPS Guide

Fig. 1: Mains Disturbances

For power protection in these business-critical environments inverter systems provide continuous power with high availability and ensure continuous and high quality power protection of mission critical loads in the industrial and commercial marketplace.

BENNING's new advanced inverter system INVERTRONIC modular is a hot-plug modular three phase system which operates from a central (battery based) 48V, 110V or 220V DC source.

INVERTRONIC modular ensures cost-effective System Scalability and continuous Power Protection and Availability

Today's traditional three phase inverter systems are heavy and bulky and are not scaleable.

The output power is fixed and cannot be adapted to changing load demands.

The new INVERTRONIC modular inverter system consists of rack mounted, parallel operating inverter modules. This design allows scaleable redundant systems with the highest power availability.

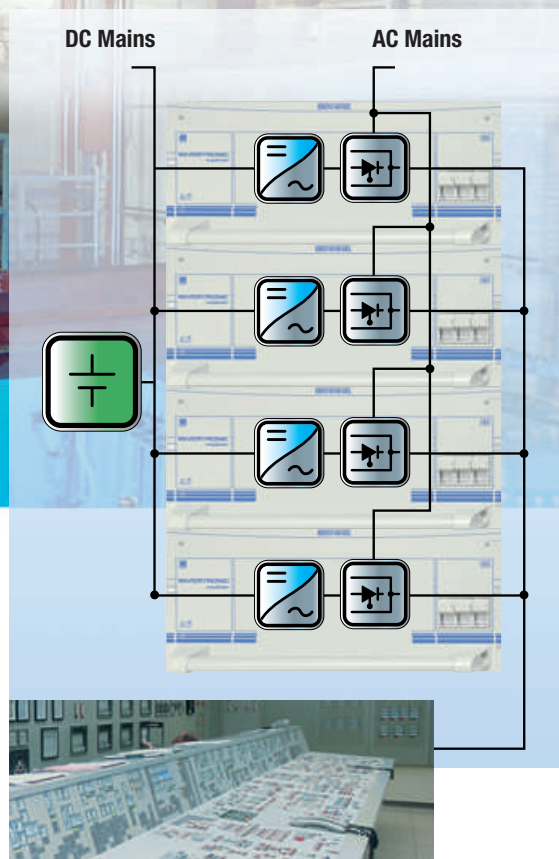


Fig. 2: Principle of the modular parallel architecture

With the modular hot-plug design of the INVERTRONIC modular, any up or downgrading of the system output power is possible.

Each INVERTRONIC modular inverter module has its own static by-pass to transfer the load to the mains if the output of the inverter deviates outside the acceptable tolerances for both voltage and frequency, caused by short circuit, overload or inverter failure.

The static by-pass will transfer the load back to the inverter without any break after the inverter output has returned within tolerance.

INVERTRONIC modular

Availability without any Compromise

Hot-plug modular redundant Design means highest Availability and short MTTR (MEAN TIME TO REPAIR)

The modular redundant concept of the INVERTRONIC modular system together with real hot plug design provides the highest level of continuous power protection availability and minimizes service and maintenance costs.

High Efficiency at rated as well as partial Loads, means less TCO (Total Cost of Ownership)

The INVERTRONIC modular inverter system has been designed to provide $\geq 90\%$ efficiency even at 50% partial load (systems with 110V and 220V DC input voltage). (Fig.4) Systems with 48V DC input, have appr.3% less efficiency.

INVERTRONIC modular Features

- Scalable three phase inverter system with hot-plug power modules
- Each Inverter module with its own electronic by-pass
- Short MTTR (Mean TIME To Repair)
Replacement of modules without any load interruption
- N+1 redundancy ensures highest availability
- High energy efficiency also at partial load saves energy costs
- Advanced inverter technology with DSP processors and IGBT /MOSFET semiconductors
- Less volume and weight of the INVERTRONIC modular inverter systems results in reduced floor space and lower transport and installation costs



Fig 3: INVERTRONIC modular 90 kVA
DC input 220 V

The redundant design (n+1) is still providing 100% power to the load even if one module fails.

The replacement of the faulty module can be done in less than 15 minutes, if the module is available on site. After the replacement the INVERTRONIC modular system is back to redundant operation.

The modular hot-plug design means system redundancy as well as reduction of service and maintenance costs.

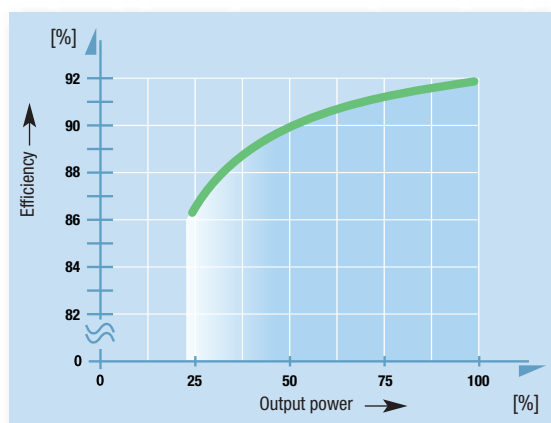


Fig. 4: Efficiency as function of output power

High efficiency is essential to reduce the energy consumption of the inverter system as well as the investment and operational costs for the cooling system.



INVERTRONIC modular

Cost Saving High Efficiency

The light and compact System Cabinets of the INVERTRONIC modular Inverters save Packing and Transport Costs.

The light weight system cabinets of the INVERTRONIC modular line are easily handled compared to the heavy cabinets of conventional (one bloc) inverter systems.

Redundant INVERTRONIC modular Systems have less Energy Consumption and require less Floor Space, compared with traditional redundant Inverter Configurations.

Fig. 5+6 show the comparison of traditional and modular n+1 redundant 60 kVA inverter systems.

To achieve redundancy using traditional inverter systems, you need to have a second complete 60kVA system for parallel operation.

The total foot print of the two systems will be two times 800mm x 800mm.


To achieve redundancy using the INVERTRONIC modular system, only one 15kVA inverter module has to be added. The foot print of that system (800mm x 600mm) will not increase, as the existing system cabinet can be used.

The foot print and the operational power consumption of the traditional two x 60 kVA systems are higher compared to the INVERTRONIC modular system.



Fig. 5: Comparison of redundant parallel inverter configurations.
INVERTRONIC modular to traditional stand-alone inverter systems.

Fig. 6: Comparison of redundant n+1 inverter systems

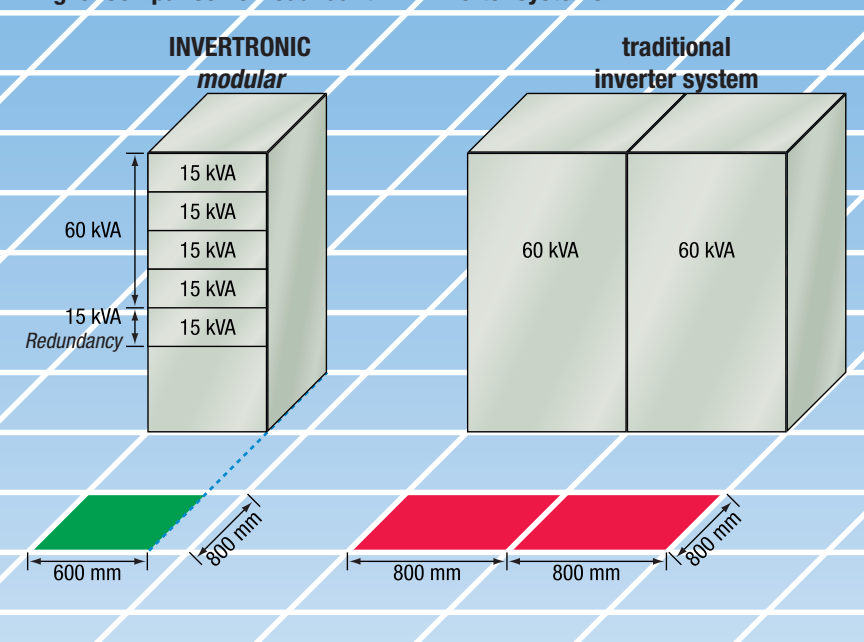

INVERTRONIC modular

Simple Operation, Rapid Diagnosis

Operation and Monitoring Front Panel (Fig. 7)

The operation and monitoring of the INVERTRONIC modular is made via the front door panel.

The operating and fault signals are indicated by 17 LED's and the system status is displayed and controlled via the built in LCD mimic diagram.

An event recorder stores each occurring event (max.250 entries) date and time.

Customer interfaces:

- RS 232 or RS 485 with MOD bus protocol
- 6 voltage free relay contacts

Options:

- Interface profibus
- Network adapter


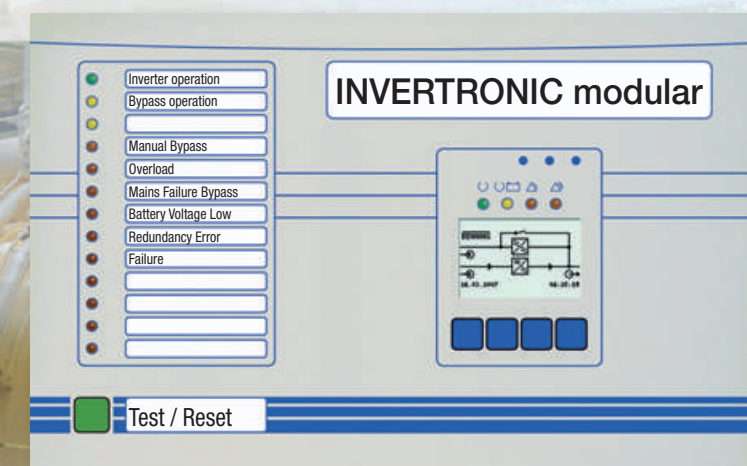


Fig. 7: Display and control unit

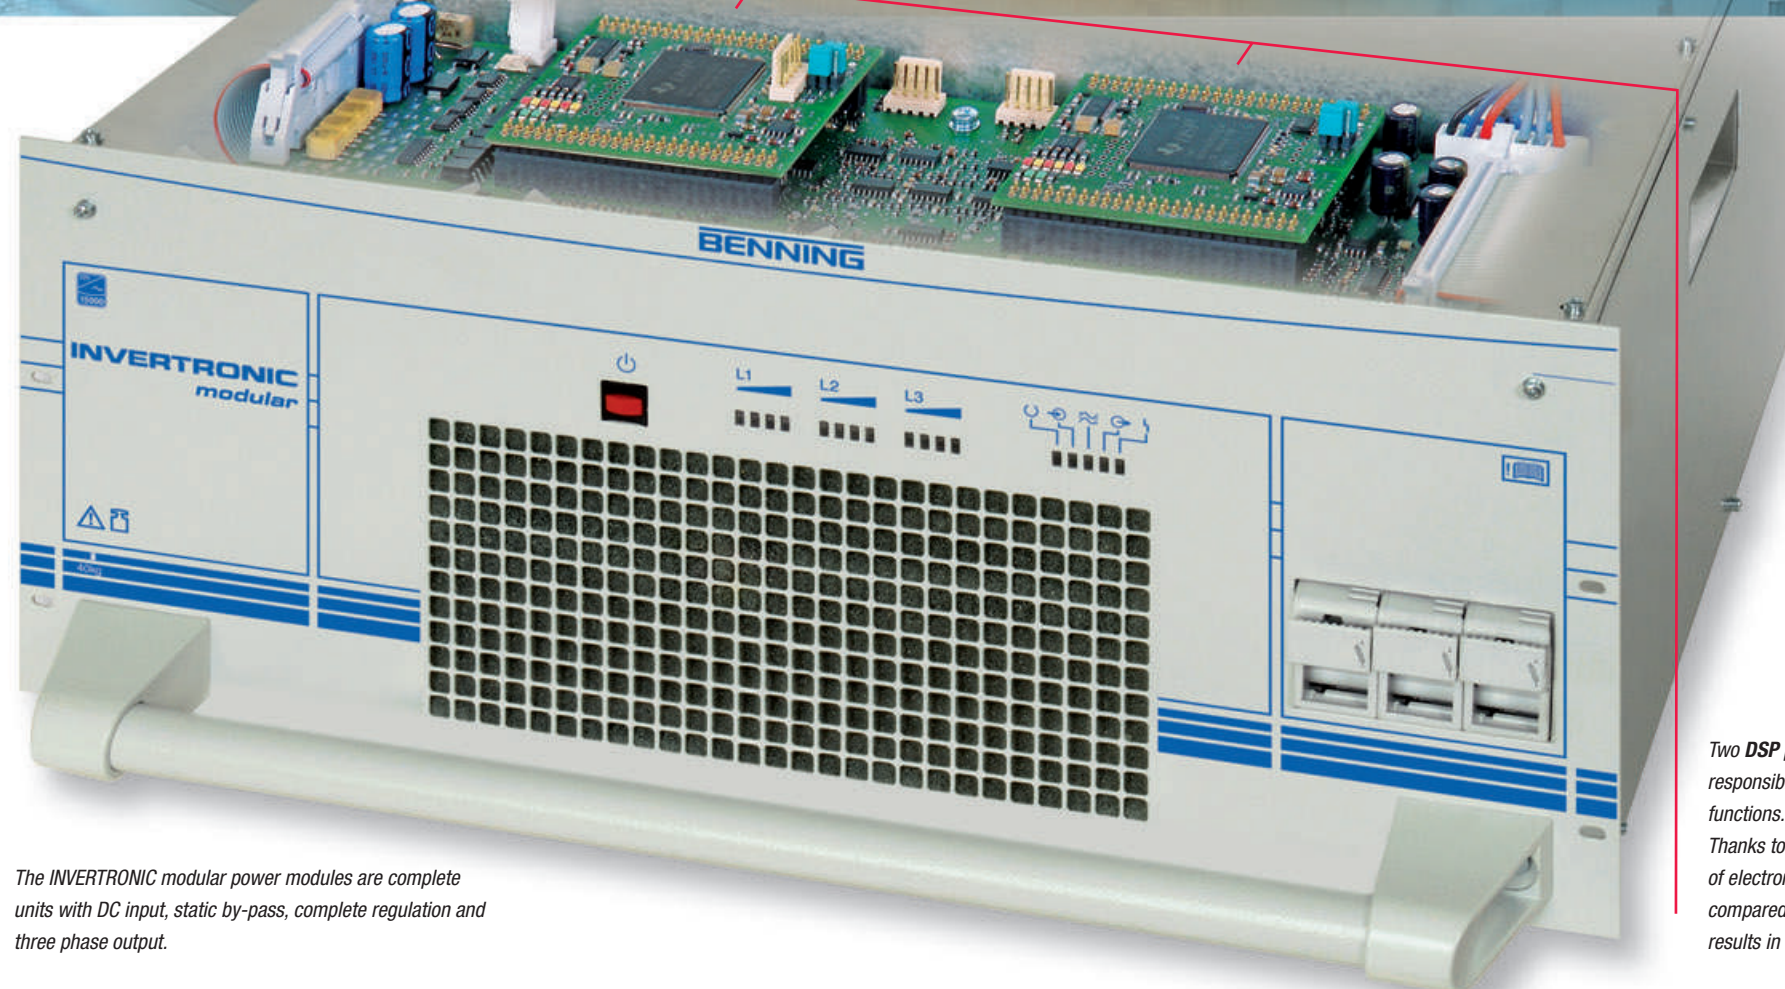

The INVERTRONIC modular power modules are complete units with DC input, static by-pass, complete regulation and three phase output.

Two **DSP processors** with high reliability are responsible for all regulation and monitoring functions.

Thanks to this advanced design the quantity of electronic components has been reduced compared to conventional inverters, which results in better MTBF figures.

INVERTRONIC modular Scaleable Power Capacity

Scaleable Power Capacity with INVERTRONIC modular Inverter modules

INVERTRONIC modular inverter modules are available for 48V, 110V and 220V DC input. Each inverter power module with DC input 48V can supply 10kVA output power and the modules with DC input 110V or 220V can supply 15kVA output power.

Available Inverter Output Power depending on Load Power Factor

The output power of the INVERTRONIC modular inverter depends on the load power factor. (Fig. 8)

The Invertronic modular inverter can supply 100% output power if the leading $\cos \phi$ of the load is 0,8. or less.



INVERTRONIC modular 30 kVA

INVERTRONIC modular 45 kVA

INVERTRONIC modular 90 kVA

These inverter modules allow the design of scaleable three phase inverter systems, and it is easy to add or remove output power.

This eliminates high initial investment costs of purchasing power capacity that is not required at the stage of installation.

Each 2000 mm high INVERTRONIC modular system cabinet is able to accommodate 6 inverter modules, and the 1800 mm high cabinet 5 inverter modules.

The total output power of one system cabinet with 48V DC input can be 50kVA and the total output power of one system cabinet with 110V or 220V DC input, can be 90kVA or 75kVA. Two INVERTRONIC modular system cabinets can be paralleled, to increase the output power capacity.

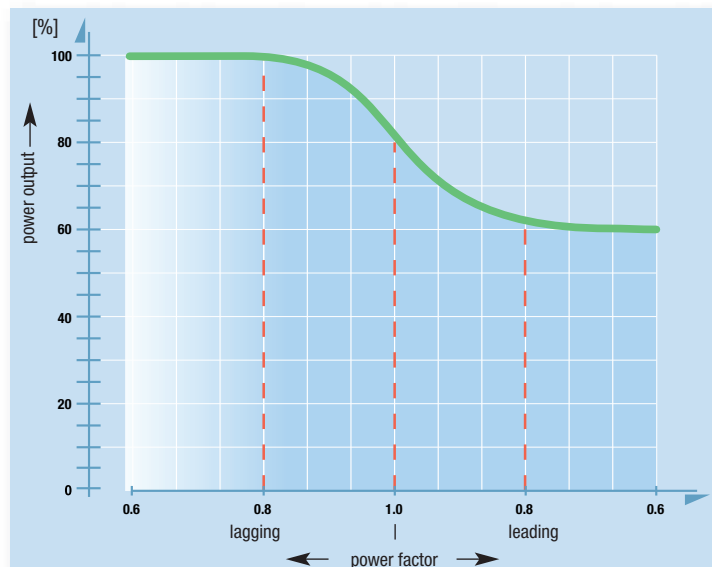


Fig. 8: Available inverter apparent output power depending on power factor

Technical Data

INVERTRONIC modular 10 – 100 kVA/ 15 – 180 kVA

Technical Data							
Three Phase Inverter Range INVERTRONIC modular							
Rated output power at (each system cabinet**)							
DC-Input 48 V	[kVA]	10	20	30	40	50	-
DC-Input 110 V / 220 V	[kVA]	15	30	45	60	75	90
No. of modules		1	2	3	4	5	6
Inverter input							
Input voltage range	[%]	-15 to +20					
Permitted overlaid AC	[%]	< 5 eff.					
Current input at 48 V DC	[A]	195	390	585	780	975	-
Current input at 110 V DC	[A]	116	232	348	464	580	716
Current input at 220 V DC	[A]	58	116	174	232	290	348
DC Power at battery operation	[kW]	13*1	26*1	39*1	52*1	65*1	78*1
*1 Input voltage DC 110V / 220 V							
Inverter output							
Output voltage	[V]	400/230 3-ph., N, PE					
Adjustment range of output voltage	[%]	± 5					
Voltage tolerance							
static	[%]	± 1					
dynamic	[%]	≤ 5 for 100 % load step					
unbalanced load	[%]	≤ 2 at 100 % unbalanced load					
Regulation time	[msec]	≤ 25					
Motor load		100 % permitted (note inrush current)					
Overload behaviour	[%]	150 for 60 sec.					
	[%]	125 for 10 min.					
Short-circuit behaviour		short circuit proof					
Short-circuit current	[A]	2 x I-nom for 3 sec.					
Output frequency	[Hz]	50 (60) ± 0,1 % quarz or mains synchronised					
Synchronisation range	[Hz]	50 (60) ± 3 %					
Wave form		Sine wave					
Distortion factor	[%]	≤ 2 with linear load					
	[%]	≤ 5 with non linear load according to EN 50091-1-1					
Efficiency							
Input voltage DC 48 V	[%]	≥ 89					
Input voltage DC 110 V/220 V	[%]	≥ 92					
General Data							
Radio interference (EMC)		in accordance with IEC 62040-2 C3					
Noise level (at 75 - 100 % load)	[dB (A)]	approx 65					
Cooling		forced cooling with speed controlled fans at air inlet					
Permitted ambient temperature	[°C]	0 to +40					
Permitted storage temperature	[°C]	-25 to +70					
Relative humidity	[%]	5 – 95 non condensing					
Per. installation altitude at nom. load	[m]	1000 m over absolute altitude without derating					
Protection		IP 20 in accordance with DIN 40050					
Painting		RAL 7035, structured paint finish					
Dimensions							
Cabinet UC 1868 (5 modules)	[mm]	1800 (H) x 600 (W) x 800 (D)					
Cabinet UC 2068 (6 modules)	[mm]	2000 (H) x 600 (W) x 800 (D)					

*2: Two system cabinets with maximum 12 modules can be paralleled, to increase the output power capacity. Specifications are subject to change without notice.

With the scaleable INVERTRONIC modular inverter system it is easy to change the output power capacity. Up or down-grading is possible without removing the power or transferring the load to the mains. High initial investment costs can be eliminated.




Fig. 9: Scalability of the INVERTRONIC modular inverter systems

BENNING worldwide

ISO
9001ISO
14001ISO
50001

SCCP

**Austria**

Benning GmbH
Elektrotechnik und Elektronik
Eduard-Klinger-Str. 9
3423 ST. ANDRÄ-WÖRDERN
Tel.: +43 (0) 22 42 / 3 24 16-0
Fax: +43 (0) 22 42 / 3 24 23
E-mail: info@benning.at

Belarus

000 «BENNING Elektrotechnik
und Elektronik»
Masherova Ave., 6A, 1003
224030, BREST
Tel.: +375 162 / 51 25 12
Fax: +375 162 / 51 24 44
E-mail: info@benning.by

Belgium

Benning Belgium
branch of Benning Vertriebsges. mbH
Wayenborgstraat 19
2800 MECHELEN
Tel.: +32 (0) 2 / 5 82 87 85
Fax: +32 (0) 2 / 5 82 87 69
E-mail: info@benning.be

Croatia

Benning Zagreb d.o.o.
Trnjanska 61
10000 ZAGREB
Tel.: +385 (0) 1 / 6 31 22 80
Fax: +385 (0) 1 / 6 31 22 89
E-mail: info@benning.hr

Czech Republic

Benning CR, s.r.o.
Zahradní ul. 894
293 06 KOSMONOSY
Tel.: +420 / 3 26 72 10 03
E-mail: odbyt@benning.cz

France

Benning
conversion d'énergie
43, avenue Winston Churchill
B.P. 418
27404 LOUVIERS CEDEX
Tel.: +33 (0) / 2 32 25 23 94
Fax: +33 (0) / 2 32 25 13 95
E-mail: info@benning.fr

Germany

Benning Elektrotechnik und Elektronik
GmbH & Co. KG
Factory I: Münsterstr. 135-137
Factory II: Robert-Bosch-Str. 20
46397 BOCHOLT
Tel.: +49 (0) 28 71 / 93-0
Fax: +49 (0) 28 71 / 9 32 97
E-mail: info@benning.de

Greece

Benning Hellas
Chanion 1, Lykovrisi 141 23
ATHENS
Tel.: +30 (0) 2 10 / 5 74 11 37
Fax: +30 (0) 2 10 / 5 78 25 54
E-mail: info@benning.gr

Hungary

Benning Kft.
Power Electronics
Rákóczi út 145
2541 LÁBATLAN
Tel.: +36 (0) 33 / 50 76 00
Fax: +36 (0) 33 / 50 76 01
E-mail: benning@benning.hu

Italy

Benning Conversione di Energia S.r.l.
Via Cimarosa, 81
40033 CASALECCHIO DI RENO (BO)
Tel.: +39 051 / 75 88 00
Fax: +39 051 / 6 16 76 55
E-mail: info@benningitalia.com

Netherlands

Benning NL
branch of Benning Vertriebsges. mbH
Peppelkade 42
3992 AK HOUTEN
Tel.: +31 (0) 30 / 6 34 60 10
Fax: +31 (0) 30 / 6 34 60 20
E-mail: info@benning.nl

Poland

Benning Power Electronics Sp. z o.o.
Korcunkowa 30
05-503 GŁOSKÓW
Tel.: +48 (0) 22 / 7 57 84 53
Fax: +48 (0) 22 / 7 57 84 52
E-mail: biuro@benning.biz

P. R. China

Benning Power Electronics (Beijing) Co., Ltd.
No. 6 Guangyuan Dongjie
Tongzhou Industrial Development Zone
101113 BEIJING
Tel.: +86 (0) 10 / 61 56 85 88
Fax: +86 (0) 10 / 61 50 62 00
E-mail: info@benning.cn

Russian Federation

000 Benning Power Electronics
Domodedovo town,
microdistrict Severny,
"Benning" estate, bldg.1
142000 MOSCOW REGION
Tel.: +7 4 95 / 9 67 68 50
Fax: +7 4 95 / 9 67 68 51
E-mail: benning@benning.ru

Slovakia

Benning Slovensko, s.r.o.
Šenkvičská 3610/14W
902 01 PEZINOK
Tel.: +421 (0) 2 / 44 45 99 42
Fax: +421 (0) 2 / 44 45 50 05
E-mail: benning@benning.sk

South East Asia

Benning Power Electronics Pte Ltd
85, Defu Lane 10
#05-00
SINGAPORE 539218
Tel.: +65 / 68 44 31 33
Fax: +65 / 68 44 32 79
E-mail: sales@benning.com.sg

Spain

Benning Conversión de Energía S.A.
C/Pico de Santa Catalina 2
Pol. Ind. Los Linares
28970 HUMANES, MADRID
Tel.: +34 91 / 6 04 81 10
Fax: +34 91 / 6 04 84 02
E-mail: benning@benning.es

Sweden

Benning Sweden AB
Box 990, Hovslagarev. 3B
19129 SOLLENTUNA
Tel.: +46 (0) 8 / 6 23 95 00
Fax: +46 (0) 8 / 96 97 72
E-mail: power@benning.se

Switzerland

Benning Power Electronics GmbH
Industriestrasse 6
8305 DIETLIKON
Tel.: +41 (0) 44 / 8 05 75 75
Fax: +41 (0) 44 / 8 05 75 80
E-mail: info@benning.ch

Turkey

Benning GmbH Turkey Liaison Office
Uğurmumcu Mh. Akşemsettin cd.
No:56 Aslı Bahçe Sitesi K:1 D:27
34882 KARTAL / ISTANBUL / TÜRKİYE
Tel.: +90 (0) 2 16 / 4 45 71 46
Fax: +90 (0) 2 16 / 4 45 71 47
E-mail: info@benning.com.tr

UAE

Benning Power Systems
Middle East / Office: 918,
9th Floor, AYA Business Center
ADNIC Building, Khalifa Street
ABU DHABI
Tel.: +971 (0) 2 / 4 18 91 50
E-mail: benningme@benning.fr

Ukraine

Benning Power Electronics
3 Sim'yi Sosninykh str.
03148 KYIV
Tel.: 0038 044 501 40 45
Fax: 0038 044 273 57 49
E-mail: info@benning.ua

United Kingdom

Benning Power Electronics (UK) Ltd.
Oakley House, Hogwood Lane
Finchampstead
BERKSHIRE
RG 40 4QW
Tel.: +44 (0) 1 18 / 9 73 15 06
Fax: +44 (0) 1 18 / 9 73 15 08
E-mail: info@benninguk.com

U.S.A.

Benning Power Electronics, Inc.
1220 Presidential Drive
RICHARDSON, TEXAS 75081
Tel.: +1 2 14 / 5 53 14 44
Fax: +1 2 14 / 5 53 13 55
E-mail: sales@benning.us

BENNING